


200MHz 2[4] Channel Digital Oscilloscope HMO2022 [HMO2024]

HMO2024



2 Channel Version
HMO2022

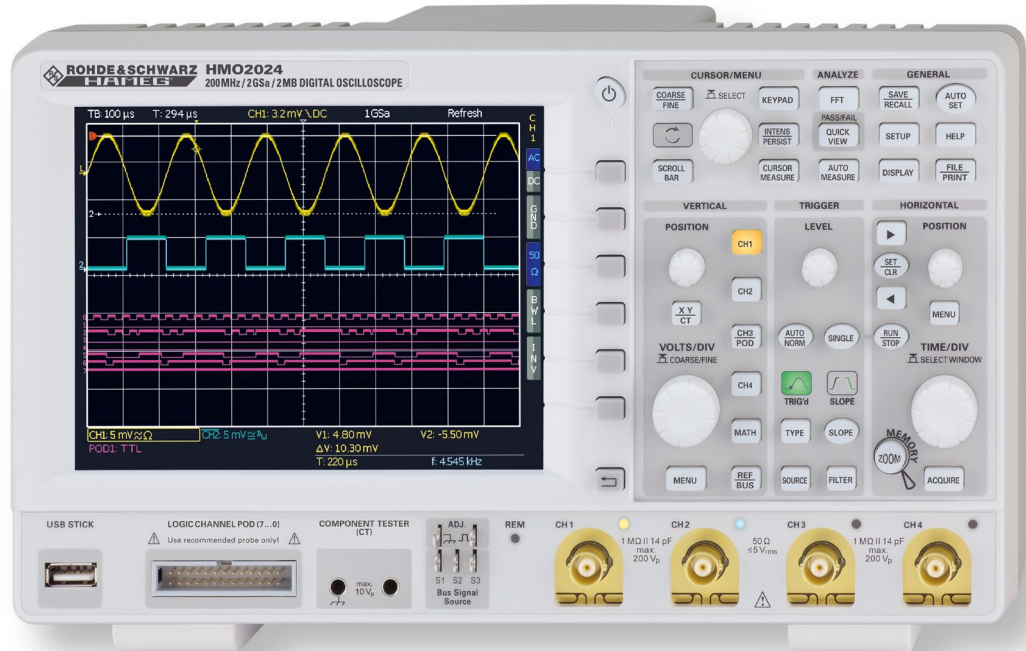


Side view



8 Channel Logic Probe
H03508



- ✓ 2GSa/s Real Time, Low Noise Flash A/D Converter (Reference Class)
- ✓ 2MPts Memory, Memory  Zoom up to 50,000:1
- ✓ MSO (Mixed Signal Opt. H03508) with 8 Logic Channels
- ✓ Serial Bus Trigger and Hardware accelerated Decode incl. List View. Options: I²C + SPI + UART/RS-232, CAN/LIN
- ✓ Automatic Search for User defined Events
- ✓ Pass/Fail Test based on Masks
- ✓ Vertical Sensitivity 1mV/div., Offset Control ±0.2...±20V
- ✓ 12div. x-Axis Display Range, 20div. y-Axis Display Range (VirtualScreen)
- ✓ Trigger Modes: Slope, Video, Pulswidth, Logic, Delayed, Event
- ✓ Component Tester, 6 Digit Counter, Automeasurement: max. 6 Parameters incl. Statistic, Formula Editor, Ratiocursor, FFT: 64kPts
- ✓ Fan: Silence redefined
- ✓ 3 x USB for Mass Storage, Printer and Remote Control

200 MHz 2 [4] Channel Digital Oscilloscope HMO2022 [HMO2024]

Firmware: ≥ 4.522

All data valid at 23 °C after 30 minutes warm-up.

Display

Display:	16.5 cm (6.5") VGA Color TFT
Resolution:	640 x 480 Pixel
Backlight:	LED 400 cd/m ²
Display area for traces:	
without menu	400 x 600 Pixel (8 x 12 div.)
with menu	400 x 500 Pixel (8 x 10 div.)
Color depth:	256 colors
Intensity steps per trace:	0...31

Vertical System

Channels:	
DSO mode	CH 1, CH 2 [CH 1...CH 4]
MSO mode	CH 1, CH 2, LCH 0...7 (Logic Channels) [CH 1, CH 2, LCH 0...7, CH 4] with Option HO3508
Auxiliary input:	Frontside (Rear side)
Function	Ext. Trigger
Impedance	1 M Ω 14 pF \pm 2 pF
Coupling	DC, AC
Max. input voltage	100V (DC + peak AC)
XYZ-mode:	All Analog Channels on individual choice
Invert:	CH 1, CH 2 [CH 1...CH 4]
Y-bandwidth (-3 dB):	200 MHz (5 mV...10V)/div. 100 MHz (1 mV, 2 mV)/div.
Lower AC bandwidth:	2 Hz
Bandwidth limiter (switchable):	approx. 20 MHz
Rise time (calculated):	<1.75 ns
DC gain accuracy:	2%
Input sensitivity:	13 calibrated steps
CH 1, CH 2 [CH 1...CH 4]	1 mV/div...10V/div. (1-2-5 Sequence)
Variable	Between calibrated steps
Inputs CH 1, CH 2 [CH 1...CH 4]:	
Impedance	1 M Ω 14 pF \pm 2 pF [50 Ω switchable]
Coupling	DC, AC, GND
Max. input voltage	200V (DC + peak AC), 50 Ω <5V _{rms}
Measuring circuits:	Measuring Category I (CAT I)
Position range:	\pm 10 Divs
Offset control:	
1 mV, 2 mV	\pm 0.2V - 10 div. x Sensitivity
5...50 mV	\pm 1V - 10 div. x Sensitivity
100 mV	\pm 2.5V - 10 div. x Sensitivity
200 mV...2V	\pm 40V - 10 div. x Sensitivity
5V...10V	\pm 100V - 10 div. x Sensitivity
Logic Channels:	With Option HO3508
Select. switching thresholds	TTL, CMOS, ECL, User -2...+8V
Impedance	100 k Ω <4 pF
Coupling	DC
Max. input voltage:	40V (DC + peak AC)

Triggering

Analog Channels:	
Automatic:	Linking of peak detection and trigger level
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at \leq 2 mV/div.)
Frequency range	5 Hz...250 MHz (5 Hz...120 MHz at \leq 2 mV/div.)
Level control range	From peak- to peak+
Normal (without peak):	
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at \leq 2 mV/div.)
Frequency range	0 Hz...250 MHz (0 Hz...120 MHz at \leq 2 mV/div.)
Level control range	-10...+10 div. from center of the screen
Operating modes:	Slope/Video/Logic/Pulses/Buses optional
Slope:	Rising, falling, both
Sources	CH 1, CH 2, Line, Ext., LCH 0...7 [CH 1...CH 4, Line, Ext., LCH 0...7]
Coupling (Analog Channel)	AC: 5 Hz...250 MHz DC: 0...250 MHz HF: 30 kHz...250 MHz LF: 0...5 kHz Noise rejection: selectable
Video:	
Standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
Fields	Field 1, field 2, both
Line	All, selectable line number
Sync. Impulse	Positive, negative
Sources	CH 1, CH 2, Ext. [CH 1...CH 4]

Logic:	AND, OR, TRUE, FALSE
Sources	LCH 0...7, CH 1, CH 2 [CH 1...CH 4]
State	LCH 0...7 X, H, L
Duration	8 ns...2.147 s, resolution 8 ns
Pulses:	Positive, negative
Modes	equal, unequal, less than, greater than, within/without a range
Range	Min. 32 ns, max. 17.179 s, resolution min. 1 ns
Sources	CH 1, CH 2, Ext. [CH 1...CH 4]
Indicator for trigger action:	LED
Ext. Trigger via:	Auxiliary input 0.3V...10V _{pp}
2 nd Trigger:	
Slope	Rising, falling, both
Min. signal height	0.8 div.; 0.5 div. typ. (1.5 div. at \leq 2 mV/div.)
Frequency range	0 Hz...250 MHz (0 Hz...120 MHz at \leq 2 mV/div.)
Level control range	-10...+10 div.
Operating modes	
after time	32 ns...17.179 s, resolution 8 ns
after incidence	1...2 ¹⁶
Serial Buses:	
Option H0010	I ² C/SPI/UART/RS-232 on Logic Channels and Analog Channels
Option H0011	I ² C/SPI/UART/RS-232 on Analog Channels
Option H0012	CAN/LIN on Logic Channels and Analog Channels

Horizontal System

Domain representation:	Time, Frequency (FFT), Voltage (XY)
Representation Time Base:	Main-window, main- and zoom-window
Memory Zoom:	Up to 50,000:1
Accuracy:	50 ppm
Time Base:	2 ns/div...50 s/div.
Roll Mode	50 ms/div...50 s/div.

Digital Storage

Sampling rate (real time):	2 x 1 GSa/s, 1 x 2 GSa/s [4 x 1 GSa/s, 2 x 2 GSa/s] Logic Channels: 8 x 1 GSa/s
Memory:	2 x 1 MPts, 1 x 2 MPts [4 x 1 MPts, 2 x 2 MPts]
Operation modes:	Refresh, Average, Envelope, Peak-Detect Roll: free run/triggered, Filter, HiRes
Resolution (vertical):	8 Bit, (HiRes up to 10 Bit)
Resolution (horizontal):	40 ps
Interpolation:	Sinx/x, linear, Sample-hold
Persistence:	Off, 50 ms... ∞
Delay pretrigger:	0...8 Million x (1/samplerate)
posttrigger	0...2 Million x (1/samplerate)
Display refresh rate:	Up to 2,000 waveforms/s
Display:	Dots, vectors, 'persistence'
Reference memories:	typ. 10 Traces

Operation/Measuring/Interfaces

Operation:	Menu-driven (multilingual), Autoset, help functions (multilingual)
Save/Recall memories:	typ. 10 complete instrument parameter settings
Frequency counter:	
0.5 Hz...250 MHz	6 Digit resolution
Accuracy	50 ppm
Auto measurements:	Amplitude, standard deviation, V _{pp} , V _{p+} , V _{p-} , V _{rms} , V _{avg} , V _{top} , V _{base} , frequency, period, pulse count, t _{width+} , t _{width-} , t _{duty} , t _{duty+} , t _{duty-} , t _{Rise10_90} , t _{Fall10_90} , t _{Rise20_80} , t _{Fall20_80} , pos. edge count, neg. edge count, pos. pulse count, neg. pulse count, trigger frequency, trigger period, phase, delay
Measurement statistic:	Min., max., mean, standard deviation, number of measurements for up to 6 Functions
Cursor measurements:	ΔV , Δt , $1/\Delta t$ (f), V to Gnd, Vt related to Trigger point, ratio X and Y, pulse count, peak to peak, peak+, peak-, mean value, RMS value, standard deviation
Search functions:	Search- and Navigation functions for specific signal parameter
Interface:	Dual-Interface USB type B/RS-232 (HO720), 2 x USB type A (front- and rear side each 1 x) max. 100 mA, DVI-D for ext. Monitor
Optional:	IEEE-488 (GPIB) (HO740), Dual-Interface Ethernet/USB (HO730)

Display functions

Marker:	up to 8 user definable marker for easy navigation; automatic marker using search criteria
VirtualScreen:	virtual Display with 20 div. vertical for all Math-, Logic-, Bus- and Reference Signals
Busdisplay:	up to 2 busses, user definable, parallel or serial busses (option), decode of the bus value in ASCII, binary, decimal or hexadecimal, up to 4 lines; Table view of the decoded data

Mathematic functions

Number of formula sets:	5 formula sets with up to 5 formulas each
Sources:	All Channels and math. memories
Targets:	Math. memories
Functions:	ADD, SUB, 1/X, ABS, MUL, DIV, SQ, POS, NEG, INV, INTG, DIFF, SQR, MIN, MAX, LOG, LN, Low-, High-pass filter
Display:	Up to 4 math. memories with label

Pass/Fail functions

Sources:	Analog Channels
Type of test:	Mask around a signal, userdefined tolerance
Functions:	Stop, Beep, screen shot (screen print-out) and/or output to printer for pass or fail, event counting up to 4 billion, including the number and the percentage of pass and fail events

General Information

Component tester:	
Test voltage:	10 V _P (open) typ.
Test current:	10 mA _P (short) typ.
Test frequency:	50 Hz/200 Hz typ.
Reference Potential:	Ground (safety earth)
Probe ADJ Output:	1 kHz/1 MHz square wave signal ~1V _{pp} (t _a < 4 ns)
Bus Signal Source:	SPI, I ² C, UART, Parallel (4 Bit)
Internal RTC (Realtime clock):	Date and time for stored data
Line voltage:	100...240V, 50...60 Hz, CAT II
Power consumption:	Max. 45W, typ. 25W [max. 55W, typ. 35W]
Protective system:	Safety class I (EN61010-1)
Operating temperature:	+5...+40 °C
Storage temperature:	-20...+70 °C
Rel. humidity:	5...80% (non condensing)
Theft protection:	Kensington Lock
Dimensions (W x H x D):	285 x 175 x 140 mm
Weight:	<2.5 kg

Accessories supplied: Line cord, Operating manual, 2 [4] Probes, 10:1 with attenuation ID (HZO10), CD, Software

Recommended accessories:

H0010	Serial bus trigger and hardware accelerated decode, I ² C, SPI, UART/RS-232 on Logic Channels and Analog Channels
H0011	Serial bus trigger and hardware accelerated decode, I ² C, SPI, UART/RS-232 on Analog Channels
H0012	Serial bus trigger and hardware accelerated decode, CAN, LIN on Logic Channels and Analog Channels
H03508	Active 8 Channel Logic Probe
H0730	Dual-Interface Ethernet/USB
H0740	Interface IEEE-488 (GPIB) galvanically isolated
HZ091	4RU 19" Rackmount Kit
HZ090	Carrying Case for protection and transport
HZ020	High voltage probe 1,000:1 (400 MHz, 1,000V _{rms})
HZ030	Active probe 1 GHz (0.9 pF, 1 MΩ, including many accessories)
HZ040	Active differential Probe 200 MHz (10:1, 3.5 pF, 1 MΩ)
HZ041	Active differential Probe 800 MHz (10:1, 1 pF, 200 kΩ)
HZ050	AC/DC Current probe 30 A, DC...100 kHz
HZ051	AC/DC Current probe 100/1,000 A, DC...20 kHz